

## Features



### Interlocking



**ground row joint**

Fixture quickly and securely interlock side by side for ground row application.




### TUV Version



**microswitch**

TUV version composes the micro-switch, when door is opened the lamp power is automatically shut down.

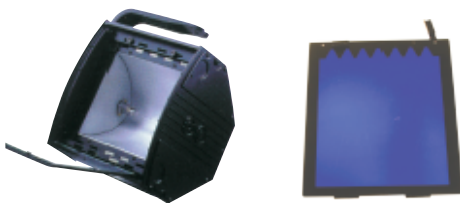

### Installation

Easy and safe lamp installation is provided via a hinged access door.  
Friendly and easy gel installation is supported with the hinged access door designed on color frame.  
The gel can be settled smoothly without wrinkle.



### Ventilation

Excellent ventilation is provided with air circulation paths at both rear and front of the reflector/ lamp housing.

