

SC190 Conversion Description

1. Function Description

This equipment can transfer VIDEO/S-VIDEO input signals to VGA/RGB output signals without interference from outside, it also avoids the signal distortion of a long distance transmission and supports three different adjustable definitions.

1.1 Input Connection


This panel has three input ports(S-VIDEO, VIDEO, 5V direct current)and one switch RES.

“1,2,3,4 on” is for the definition option (800X600, 1024X768, 1280X1024) and S-VIDEO/VIDEO input, in which “1,2,3 up” is for the separate definition and “down” is maintain the original definition, “4 up” is S-VIDEO input and “down” is VIDEO input.

“S-VIDEO” is for S-VIDEO signals input.


“VIDEO” is for VIDEO signals input.

“DC 12V” is for 12V direct current input.

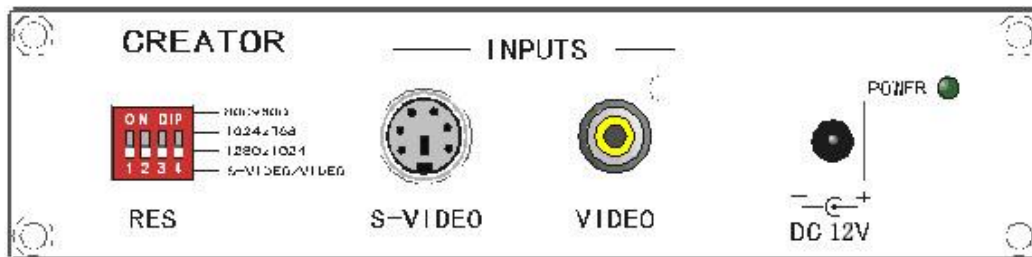

1.2 Output Connection

Output panel is as follows:

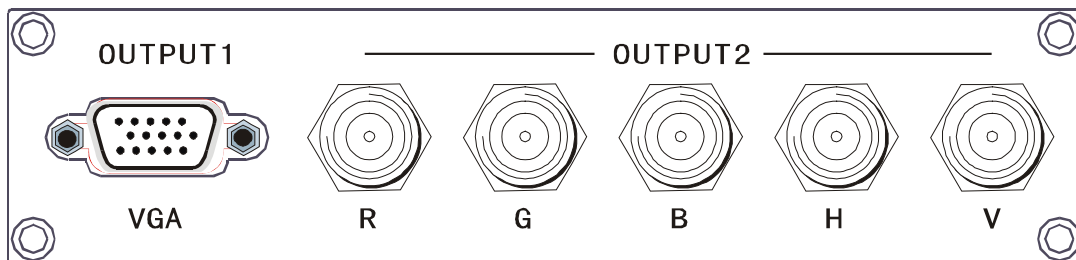

In order to avoid the distortion and interference, the output signal cable is better to be short.