




## Spotlight Ceiling Loudspeaker SLC-2060 Series

The SLC-2060 series has been designed to mimic a ceiling mounted spotlight or downlighter. The unit has been fitted with a full range 2.5" driver unit capable of very respectable 170Hz ~ 20kHz frequency range. Due to its diminutive size the SLC-2060 series is ideal for installations where unobtrusive design is paramount. Four colour options are available for architectural integrity. The units are available with 100 & 70.7 volt line transformers or 8Ω operation. Installations such as hotel lobbies, high quality retail outlets and also home use are some of the many applications possible.

For your peace of mind and accurate system design, sample CES Audio products are extensively tested in our Anechoic Test Chamber, Withstanding/Insulation Tester and Programmable Temperature & Humidity Chamber to ensure accurate specification, safety and reliability.

All CES Audio loudspeakers are designed to withstand operating at their rated power for 100 hours in accordance with IEC 268-5 Power Handling Capacity standards.

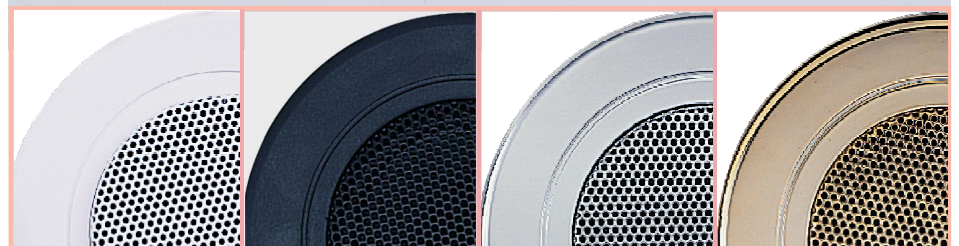

RAL9016

RAL9005

Chrome


Gold

# SLC-2060 Series


- ▶ **Designed to look like ceiling spotlights.**
- ▶ **Same size and fixing mechanism as spotlights.**
- ▶ **Remarkable sound quality from small unit.**
- ▶ **2.5" full range driver unit.**
- ▶ **100mm diameter grille. Gold & Chrome options have a grille diameter of 104mm.**
- ▶ **Designed for unobtrusive installation.**
- ▶ **Available in 100 volt, 70.7 volt and 8Ω.**
- ▶ **Available in four colour options**
  - White (RAL 9016)**
  - Black (RAL 9005) order with suffix 'B'**
  - Chrome order with suffix 'C'**
  - Gold order with suffix 'G'**

Model No.	SLC-2068	SLC-2060
Rated Power (rms)	6W	
Impedance	8Ω	833Ω, 1667Ω, 3333Ω, 6667Ω
Power Taps @ 100V	n.a.	6W, 3W & 1.5W
Power Taps @ 70.7V		6W, 3W, 1.5W & 0.75W
SPL (1W/1m)	86dB	
Max. SPL (6W/1m)	93dB	
Frequency Range (-10dB)	150 Hz ~ 20K Hz	
Dispersion 1K Hz/4K Hz	200° / 80°	
Ambient Temperature	-30°C ~ 60°C	
Power Selection Way	n.a.	Plug
Material	Baffle: UL94V0 ABS with fiber, Grille: Steel	
Colour/Finish	White (RAL 9016)/Black (RAL 9005)/Chrome/Gold	
Dimensions	100 (3.94) C & G : 104 (4.09) Dia. X 95.5 (3.76) Height mm. (in.)	
Cutout Size	92 (3.62) Dia. mm. (in.)	
Net Weight (ea)	0.3 Kgs (0.66 lbs.)	0.55 Kgs (1.21 lbs.)
Shipping Weight (20 pcs)	8.5 Kgs (19 lbs.)	13.5 Kgs (30 lbs.)
Shipping Meas't (20 pcs)	1.4 cuft	
Mounting	Spring	


Installation Guide

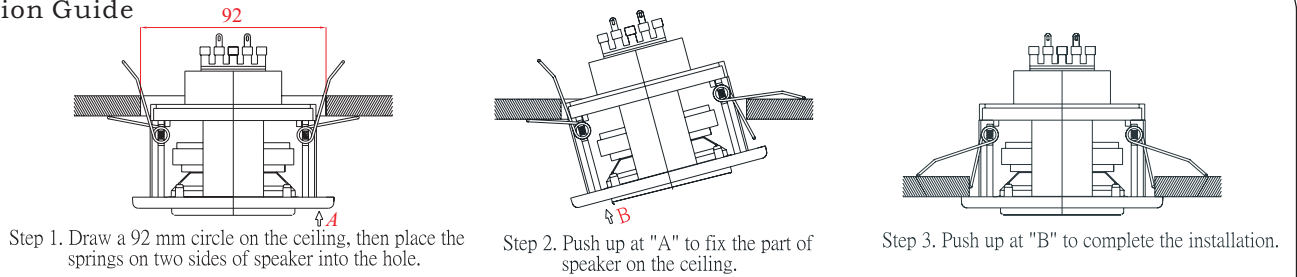


Dimension

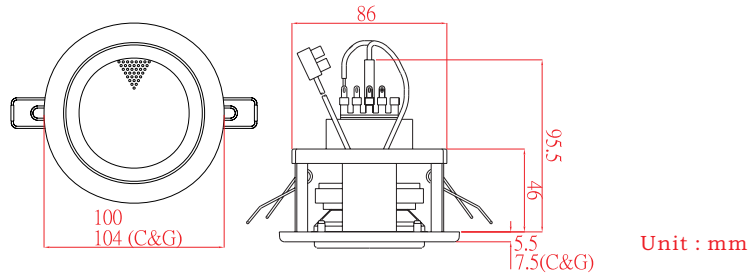

Frequency Response

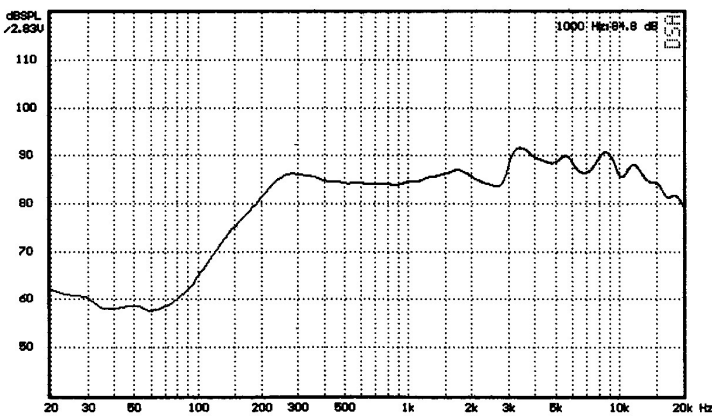

Polar Plot

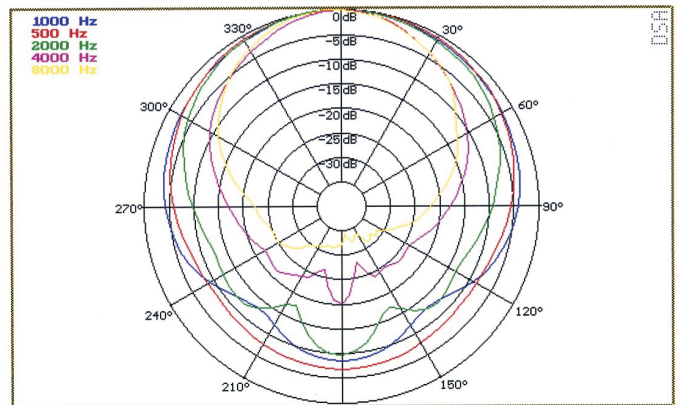

SLC-2060 SERIES

Public Address Loudspeakers